

04/15/99

JCS95 U.S. PTO

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 CFR 1.63(b))</i>	Attorney Docket No. 761/99-2075	Total Pages
	First Named Inventor or Application Identifier	
	Norio MINAMITANI et al.	
	Express Mail Label No.	

JCS94 U.S. PTO

09/292386

04/15/99

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, D.C. 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form <i>(Submit an original, and a duplicate for fee processing)</i>	6. <input type="checkbox"/> Microfiche Computer Program <i>(Appendix)</i>
2. <input checked="" type="checkbox"/> Specification [Total Pages 18] <i>(preferred arrangement set forth below)</i> <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings <i>(if filed)</i>- Detailed Description- Claim(s)- Abstract of the Disclosure	7. Nucleotide and/or Amino Acid Sequence Submission <i>(if applicable, all necessary)</i> <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) <i>(35 USC 113)</i> [Total sheets - 9]	ACCOMPANYING APPLICATION PARTS
4. Oath or Declaration [Total Pages - 3] <ul style="list-style-type: none">a. <input checked="" type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) <i>(for continuation/divisional with Box 17 completed)</i> [Note Box 5 below]<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).	8. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))
5. <input type="checkbox"/> Incorporation By Reference <i>(usable if Box 4b is checked)</i> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney <i>(when there is an assignee)</i>
	10. <input type="checkbox"/> English Translation Document <i>(if applicable)</i>
	11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations
	12. <input checked="" type="checkbox"/> Preliminary Amendment
	13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(Should be specifically itemized)</i>
	14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired
	15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i>
	16. <input type="checkbox"/> Other
17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No.	
18. CORRESPONDENCE ADDRESS	
WENDEROTH, LIND & PONACK, L.L.P. 2033 K Street, N.W., Ste. 800 Washington, D.C. 20006 Phone: (202) 721-8200 Fax: (202) 721-8250	

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of : ATTENTION
Norio MINAMITANI et al. : APPLICATION BRANCH
Serial No. NEW :
Filed April 15, 1999 : Attorney's Docket No.
761/99-2075
LOOM RESTARTING METHOD :

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents,
Washington, D.C.

Sir:

Please amend the above-identified application as follows.

In the Specification:

Page 6, line 15, change "ayamakura" to --wavy set
mark--.

REMARKS

The above amendment to page 6 of the specification
corrects an inadvertent omission of translation. Entry is
requested.

Respectfully Submitted,

Norio MINAMITANI et al.

By: Charles R. Watts

Charles R. Watts
Registration No. 33,142
Attorney for Applicants

CRW/asd
WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Ste. 800
Washington, D.C. 20006
Telephone (202) 721-8200

April 15, 1999

SPECIFICATION

LOOM RESTARTING METHOD

BACKGROUND OF THE INVENTION

Field of the invention

The present invention relates to a method of restarting a loom which is stopped upon the occurrence of faulty picking or a loom stopping cause that requires stopping the loom.

Description of the Related Art

Figs. 1 and 2 are diagrams of weaving cycles A, B and C in which conventional procedures of stopping a loom upon the occurrence of a loom stopping cause requiring stopping the loom, removing the loom stopping cause and restarting the loom, in relation with the angular position of the main shaft of the loom. Fig. 1 shows a procedure of stopping and restarting the loom when the loom is stopped due to faulty picking, and Fig. 2 shows a procedure of stopping and restarting the loom when the loom is stopped due to a loom stopping cause other than faulty picking.

Referring to Figs. 1 and 2, a picking operation is carried out at an angular position of about 80° in the weaving cycle A, and a beating-up operation is completed at an angular position of 360° corresponding to an angular position of 0° in the weaving cycle B. When a fault is detected in the weaving cycle B and a stop signal is provided at an angular position of, for example, 290° , generally, the loom keeps operating for a braking period corresponding to about one turn of the main shaft, and the loom comes to an initial stop with the main shaft at an angular position of, for example, 260° in the weaving cycle C. Any picking operation is not carried out in the weaving cycle C subsequent to the weaving cycle B in which the loom

stopping cause was detected. A shedding operation, a beating-up operation, a let-off operation and a take-up operation are carried out while the loom is being braked to stop the same.

Referring to Fig. 1, when a weft yarn is picked by faulty picking, a loom controller, not shown, reverses the loom at a low speed, stops the loom for an intermediate stop at an angular position of, for example, 180° in the weaving cycle B in which faulty picking occurred to remove a weft yarn picked by faulty picking. In this state, the weft yarn picked by faulty picking is removed by an operator or by an automatic weft extracting device. Subsequently, the loom is further reversed at a low speed and is stopped for a final stop at an angular position of, for example, 310° in the weaving cycle A preceding the weaving cycle B, and then the loom is restarted. When warp yarns need mending, the warp yarns are mended while the loom is at any one of the stops.

Referring to Fig. 2, if the loom is stopped in spite of successful picking, the intermediate stop is skipped, and the loom is reversed and stopped for the final stop at an angular position of, for example, 310° in the weaving cycle B preceding the weaving cycle C in which the loom was stopped for the initial stop, and then the loom is restarted. If the warp yarn need mending, the warp yarns are mended at any one of the stops.

When the loom is reversed at a low speed in a period in which the weaving operations of the loom are stopped, the cloth fell of a fabric on the loom is beaten by a false beating-up operation and several weft yarns adjacent to the cloth fell are dislocated in the direction of the thickness of the fabric. As is generally known, a thick filling streak, i.e., a pillowlike protrusion extending across the fabric generally called "wavy set mark", is liable to be formed if the loom is restarted with the weft yarns adjacent to the cloth fell dislocated in the direction of the thickness of the fabric. A false

beating-up operation is repeated three times as shown in Fig. 1 when faulty picking occurs. A false beating-up operation is repeated twice as shown in Fig. 2 when the loom is not stopped due to faulty picking. The repetition of the false beating-up operation causes the defect called "wavy set mark".

There is a known loom restarting method called "one-shot-picking method" as means for preventing the defect called "wavy set mark". As shown in Fig. 3, the one-shot picking method inserts one weft yarn after removing the weft yarn picked by faulty picking when the loom is at the position for the intermediate stop (Fig. 1), and then restarts the loom. Therefore, two false beating-up operations can be omitted, so that the formation of the defect called "wavy set mark" can be prevented.

However, when the loom is restarted by the one-shot-picking method, the weft yarn inserted into the shed at the restart of the loom cannot be beaten up properly because the main shaft is at an angular position of, for example, 180° where the warp is substantially in a maximum shed for picking, the rotating speed of the main shaft of the loom is unable to rise to a normal operating speed before the first beating-up operation after restarting and, consequently, a light filling bar is formed. Furthermore, the one-shot-picking method cannot be applied to restarting the loom when the loom is stopped due to a cause other than faulty picking.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to prevent the formation of a thick filling streak called "wavy set mark" when restarting a loom stopped by a stopping cause.

According to a first aspect of the present invention, a loom restarting method comprises the steps of: providing a loom stopping command upon the occurrence of a loom stopping cause entailing faulty picking in a loom;

withholding the loom from a picking operation during a braking period to stop the loom in a weaving cycle subsequent to a weaving cycle in which faulty picking occurred; reversing the loom to the weaving cycle in which faulty picking occurred; removing a weft yarn picked by faulty picking; and restarting the loom for a normal weaving operation; wherein the main shaft of the loom is positioned, after removing the weft yarn picked by faulty picking, at an angular position at which a picking operation is possible in the weaving cycle in which the weft yarn picked by faulty picking was removed and a reed included in the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, and then the loom is restarted.

According to a second aspect of the present invention, a loom restarting method comprises the steps of: providing a loom stopping command upon the occurrence of a loom stopping cause other than faulty picking in a loom; withholding the loom from a picking operation during a braking period to stop the loom for an initial stop in a weaving cycle subsequent to a weaving cycle in which the loom stopping cause occurred; removing the loom stopping cause; and restarting the loom for a normal weaving operation; wherein the main shaft of the loom is positioned at an angular position at which a picking operation is possible in the weaving cycle in which the loom was stopped for the initial stop and a reed included in the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, and then the loom is restarted.

According to a third aspect of the present invention, a loom restarting method comprises the steps of: providing a loom stopping command upon the occurrence of a loom stopping cause in a loom; withholding the loom from a picking operation during a braking period to stop the loom for an initial stop in a weaving cycle subsequent to a weaving cycle in which the loom stopping cause occurred; removing the loom stopping

cause; and restarting the loom for a normal weaving operation; wherein a decision is made as to whether or not the loom stopping cause entails faulty picking before the loom is stopped for the initial stop; the loom is reversed to a weaving cycle in which faulty picking occurred, a weft yarn picked by faulty picking is removed, and the main shaft of the loom is positioned at an angular position at which a picking operation is possible in the weaving cycle in which faulty picking occurred and a reed included in the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, and then the loom is restarted if the loom stopping cause entails faulty picking; or the loom stopping cause is removed, the main shaft of the loom is positioned at an angular position at which a picking operation is possible in the weaving cycle in which faulty picking occurred and the reed of the loom is not in contact with a weft yarn inserted in the cloth fell of the fabric on the loom, and then the loom is restarted if the loom stopping cause does not entail faulty picking.

According to a fourth aspect of the present invention, a loom restarting method comprises the steps of: providing a loom stopping command upon the occurrence of a loom stopping cause in a loom; withholding the loom from a picking operation during a braking period to stop the loom for an initial stop in a weaving cycle subsequent to a weaving cycle in which the loom stopping cause occurred; removing the loom stopping cause; and restarting the loom for a normal weaving operation; wherein a decision is made as to whether or not the loom stopping cause entails faulty picking before the loom is stopped for the initial stop; and the loom is restarted either after reversing the loom to a weaving cycle in which faulty picking occurred, removing a weft yarn picked by faulty picking, and carrying out a picking operation, or after removing the weft yarn picked by faulty picking, and positioning a main shaft included in the loom at an angular

position at which a picking operation is possible in the weaving cycle in which faulty picking occurred and the reed of the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, depending on weaving conditions if the loom stopping cause entails faulty picking, or the loom is restarted after removing the loom stopping cause, and positioning the main shaft of the loom at an angular position at which a picking operation is possible in the weaving cycle in which the loom was stopped for the initial stop and the reed of the loom is not in contact with a weft yarn inserted in the cloth fell of the fabric on the loom if the loom stopping cause does not entail faulty picking.

According to the present invention, the number of false beating-up operations can be reduced in a process between the stop of the loom and the restart of the same and several picked weft yarns adjacent to the cloth fell of the fabric will scarcely be dislocated in the direction of the thickness of the fabric. Thus, the defect called "ayamakura" is prevented and the quality of the fabric can be improved.

According to the first and the second aspect of the present invention, since a picking operation is possible in the weaving cycle in which the weft yarn picked by faulty picking is removed or in the weaving cycle in which the loom is stopped for the initial stop, and with the main shaft of the loom positioned at the angular position at which the reed is not in contact with the weft yarn in the cloth fell, a picking operation can be achieved without trouble after the loom has been restarted.

According to the third and the fourth aspect of the present invention, a decision is made as to whether or not the loom stopping cause includes faulty picking, and the loom is restarted from the weaving cycle in which the weft yarn picked by faulty picking is removed or the weaving cycle in which the loom is stopped for the initial stop depending on a decision as to whether

or not the loom stopping cause includes faulty picking. Thus, the loom can be restarted from an appropriate weaving cycle.

According to the fourth aspect of the present invention, an angular position of the main shaft of the loom is determined according to the decision as to whether or not the loom stopping cause includes faulty picking and the weaving conditions. Therefore an appropriate angular position for the main shaft of the loom can be determined.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent from the following description taken in connection with the accompanying drawings, in which:

Fig. 1 is a diagram of assistance in explaining a conventional loom restarting method by which a loom is restarted after being stopped due to faulty picking;

Fig. 2 is a diagram of assistance in explaining a conventional loom restarting method by which a loom is restarted after being stopped due to a loom stopping cause other than faulty picking;

Fig. 3 is a diagram of assistance in explaining a conventional one-shot-picking method by which a loom is restarted after being stopped due to faulty picking;

Fig. 4 is a diagram of assistance in explaining a loom restarting method according to the present invention by which a loom is restarted after being stopped due to faulty picking;

Fig. 5 is a diagram of assistance in explaining a loom restarting method according to the present invention by which a loom is restarted after being stopped due to a loom stopping cause other than faulty picking;

Fig. 6 is a flow chart of a control program to be carried out by a loom

restarting method according to the present invention;

Fig. 7 is a flow chart of a control program to be carried out by a loom restarting method according to the present invention;

Fig. 8 is a block diagram of a control system for carrying out a loom restarting method according to the present invention; and

Fig. 9 is a block diagram of a control system for carrying out a loom restarting method according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A loom restarting method in a first embodiment according to the present invention will be described with reference to Figs. 4 and 5. Fig. 4 shows a procedure to be carried out by the loom restarting method when a loom is stopped due to faulty picking. Fig. 5 shows a procedure to be carried out by the loom restarting method when a loom is stopped due to a loom stopping cause other than faulty picking. Steps of the procedure shown in Fig. 4 from an initial stop to an intermediate stop are the same as those of the procedure of the conventional loom restarting method previously described with reference to Fig. 1. Steps of the procedure shown in Fig. 5 to an initial stop are the same as those of the procedure of the conventional loom restarting method previously described with reference to Fig. 2.

Referring to Fig. 4, when a faulty picking occurs in a loom in a weaving cycle B, the loom is stopped for an initial stop in a weaving cycle C subsequent to the weaving cycle B, the loom is reversed at a low speed to an angular position for an intermediate stop, a weft yarn picked by faulty picking is removed during the intermediate stop by an operator or an automatic weft extracting device, the loom is reversed at a low speed to an angular position of, for example, 60° in the weaving cycle B for a final stop, and then the loom is restarted. Then, a picking operation is executed in the

weaving cycle B and the weaving operation of the loom is resumed. This loom restarting method will be called "60°-starting method" in the following description.

When the loom is restarted by the 60°-starting method, the first weft yarn picked after the restart of the loom can properly be beaten up, and the loom is stopped for both the intermediate and final stop in the same weaving cycle B. Therefore, the number of false picking operations is less by two than that of false picking operations necessary when the loom is restarted by the foregoing conventional loom restarting method. Accordingly, several weft yarns adjacent to the cloth fell of a fabric on the loom are scarcely dislocated in the direction of the thickness of the fabric and hence the formation of a defect called "wavy set mark" can be prevented.

The 60°-starting method exercises the same effect in restarting the loom stopped due to a loom stopping cause other than faulty picking. Referring to Fig. 5, when a loom stopping cause other than faulty picking occurs in a weaving cycle B, the loom is stopped in the weaving cycle C for an initial stop, the loom is reversed at a low speed to an angular position of, for example, 60° in the weaving cycle C, and then the loom is restarted. The first picking operation after the restart of the loom is executed in the weaving cycle C and the weaving operation of the loom is resumed.

The angular position of 60° at which the loom is restarted by the 60°-starting method is an optimum angular position selectively determined on the basis of data acquired through the experimental operation of the loom. The angular position for restarting the loom is not limited to 60° and may be any angular position provided that the first picking operation after the restart of the loom can be achieved in the weaving cycle in which the loom is restarted and the reed of the loom does not come into contact with a weft yarn inserted in the cloth fell of a fabric on the loom in the weaving cycle in

which the loom is restarted.

It is desirable that the loom is restarted with the main shaft at an angular position smaller than 70° to secure a sufficient picking period and to beat up properly a weft yarn picked by the first picking operation after the restart of the loom.

Several picked weft yarns adjacent to the cloth fell are loose and are not woven exactly in the fabric. Therefore, those weft yarns are dislocated slightly from a beating-up position toward the let-off motion of the loom and hence it is possible that the reed comes into contact with those weft yarns adjacent to the cloth fell when the main shaft of the loom is at an angular position in the range of 30° to 40° .

When mending warp yarns before restarting the loom, particularly when piecing together warp yarns near temples disposed near the opposite ends of the cloth fell, it is necessary that the reed is spaced a sufficient distance apart from the cloth fell toward the let-off motion to provide a sufficient space for warp yarn piecing work between the reed and the cloth fell. Therefore, the angular position of the main shaft for restarting the loom must be greater than 40° . Accordingly, an appropriate angular position of the main shaft at the restart of the loom is in the range of 40° to 70° .

The 60° -starting method need not be applied exclusively only to restarting the loom when the loom is stopped due to faulty picking or to restarting the loom when the loom is stopped due to a loom stopping cause other than faulty picking. As shown in Fig. 6, a decision may be made as to whether or not faulty picking occurred after the loom has been stopped, and either a procedure of restarting the loom when the loom is stopped due to faulty picking or a procedure of restarting the loom when the loom is stopped due to a loom stopping cause other than faulty picking may be carried out

depending on the cause of stopping of the loom. The suitable procedure may manually or automatically selected. When necessary, the warp yarns may be mended while the loom is in any one of the initial, the intermediate and the final stop. Generally, a start button is operated by an operator to start the loom. The start button is operated when providing a start button signal S1 after the initial stop and when providing a start button signal S2 after removing the weft yarn picked by faulty picking while the loom is in the intermediate stop (or in the final stop) as shown in Fig. 6. If the weft yarn picked by faulty picking is removed by an operator, the start button is operated to provide the start button signal S2 after removing the weft yarn picked by faulty picking. If the weft yarn picked by faulty picking is removed by an automatic weft extracting device, the start button is operated to provide the start button signal S1 after the loom has been stopped for the initial stop, and the following steps including a loom restarting step may be carried out automatically, which will prevent troubles resulting from wrong manual operations. If the loom stopping cause is only faulty picking and the weft yarn picked by faulty picking can be removed by the automatic weft extracting device, all the steps of the procedure may be automated and the operation of the start button may be omitted. If the automatic weft extracting device fails in removing the weft yarn picked by faulty picking, the same weft yarn may be removed by an operator, and the start button is operated by an operator to provide the start button signal S2.

A loom restarting method in a second embodiment according to the present invention will be described hereinafter. First, the effect of the use of both the 60°-starting method and the one-shot-picking method in combination will be described. As mentioned above, false picking operations while the weaving operation is stopped cause the defect called "wavy set mark". It is known that the reverse operation of the loom at a low

speed while the weaving operation is stopped also causes the defect called "wavy set mark". As mentioned above, when the loom is restarted by the one-shot-picking method, the first weft yarn picked after the restart of the loom can not properly be beaten up. However, when loom is restarted by the one-shot-picking method, the number of false picking operations is less by two than that of false picking operations necessary when the loom is restarted by the conventional loom restarting method and one reversing operation can be omitted. These effects of the one-shot-picking method prevents the formation of the defect called "wavy set mark". Therefore, it is preferable to restart the loom by the one-shot-picking method when the loom is operating under weaving conditions not requiring heavy beating-up, such as those for weaving a coarse fabric. Accordingly, the formation of the defect called "wavy set mark" can further effectively prevented if the one-shot-picking method or the 60°-starting method is used selectively depending on weaving conditions.

Fig. 7 is a flow chart of a control program to use the one-shot-picking method or the 60°-starting method selectively depending on weaving conditions. The selection of either the one-shot-picking method or the 60°-starting method is necessary only when the loom is stopped due to faulty picking. If the loom is stopped by a loom stopping cause other than faulty picking, the same procedure as that shown in Fig. 6 is carried out. As mentioned in connection with Fig. 6, the loom may be restarted automatically without requiring the operation of the start button (Fig. 6) or may be restarted by operating the start button to provide the start button signal S1 or the start button S2 (Fig. 7) if the loom is stopped by faulty picking and the weft yarn picked by faulty picking can be removed by the automatic weft extracting device.

The first picking operation after the weaving operation has been

resumed is executed in a weaving cycle in which the weaving operation is resumed when the loom is restarted by the 60°-starting method. The first picking operation after the weaving operation has been resumed is executed in a weaving cycle subsequent to a weaving cycle in which the weaving operation is resumed when the loom is restarted by the one-shot-picking method. Since the speed of the slay of the loom in the weaving cycle in which the weaving operation is resumed and that of the same in the weaving cycle next to that in which the weaving operation is resumed are different, it is desirable to set specific picking conditions including the angular position of the main shaft for operating the yarn holding pin of a weft yarn measuring and storing device, the angular position of the main shaft for starting the jetting operation of a picking nozzle and the angular position of the main shaft for stopping the jetting operation of the picking nozzle for each of the 60°-starting method and the one-shot-starting method.

Fig. 8 shows a control system for carrying out the 60°-starting method. A stop command, such as a stop signal provided by operating a stop button 3 or a loom stopping cause detection signal provided by a loom stopping cause detector 2, is given to a controller 1. The controller 1 finds the angular position of the main shaft from an angular position signal θ provided by an encoder 4, gives a stop signal to a main motor 5 and a main shaft braking device 6, and gives a stop command to a picking motion 7 and a let-off motion 8 to stop picking a weft yarn in the next weaving cycle and to stop the let-off operation of the let-off motion 8. A shedding motion 9, a beating-up motion 10 and a take-up motion 11 perform a shedding operation, a beating-up operation and a take-up operation, respectively, in synchronism with the operation of the main motor 5. If the loom stopping cause detection signal indicates faulty picking, the controller 1 gives an operation command to an automatic weft extracting device 12 to extract a weft yarn

picked by faulty picking from the shed. The controller 1 controls all or some of the steps of the procedure to be carried out after the stop of the loom to restart the loom according to information stored in a storage device 13.

Fig. 9 shows a control system for selectively carrying out the 60°-starting method and the one-shot-starting method. The control system shown in Fig. 9 is provided, in addition to components corresponding to those of the control system shown in Fig. 8, with a method selecting device 14 for selecting either the 60°-starting method or the one-shot-starting method. Upon the reception of the stop signal and the loom stopping cause detection signal, the method selecting device 14 selects either the 60°-starting method or the one-shot-starting method on the basis of information about weaving conditions given previously thereto, and gives a selection signal indicating the selection of either the 60°-starting method or the one-shot-starting method to the controller 1.

Although the invention has been described in its preferred form with a certain degree of particularity, obviously many changes and variations are possible therein. It is therefore to be understood that the present invention may be practiced otherwise than as specifically described herein without departing from the scope and spirit thereof.

What is claimed is:

1. A loom restarting method comprising the steps of:

providing a loom stopping command upon the occurrence of a loom stopping cause entailing faulty picking in a loom;

withholding the loom from a picking operation during a braking period to stop the loom in a weaving cycle subsequent to a weaving cycle in which faulty picking occurred;

reversing the loom to the weaving cycle in which faulty picking occurred;

removing a weft yarn picked by faulty picking; and

restarting the loom for a normal weaving operation;

wherein a main shaft included in the loom is positioned, after removing the weft yarn picked by faulty picking, at an angular position at which a picking operation is possible in the weaving cycle in which the weft yarn picked by faulty picking was removed and a reed included in the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, and then the loom is restarted.

2. A loom restarting method comprising the steps of:

providing a loom stopping command upon the occurrence of a loom stopping cause other than faulty picking in a loom;

withholding the loom from a picking operation during a braking period to stop the loom for an initial stop in a weaving cycle subsequent to a weaving cycle in which the loom stopping cause occurred;

removing the loom stopping cause; and

restarting the loom for a normal weaving operation;

wherein the main shaft of the loom is positioned at an angular position at which a picking operation is possible in the weaving cycle in which the loom was stopped for the initial stop and a reed included in the

loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, and then the loom is restarted.

3. A loom restarting method comprising the steps of:

providing a loom stopping command upon the occurrence of a loom stopping cause in a loom;

withholding the loom from a picking operation during a braking period to stop the loom for an initial stop in a weaving cycle subsequent to a weaving cycle in which the loom stopping cause occurred;

removing the loom stopping cause; and

restarting the loom for a normal weaving operation;

wherein a decision is made as to whether or not the loom stopping cause entailed faulty picking before the loom is stopped for the initial stop;

the loom is reversed to a weaving cycle in which faulty picking occurred, a weft yarn picked by faulty picking is removed, and a main shaft included in the loom is positioned at an angular position at which a picking operation is possible in the weaving cycle in which faulty picking occurred and a reed included in the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, and then the loom is restarted if the loom stopping cause entails faulty picking; or

the loom stopping cause is removed, the main shaft of the loom is positioned at an angular position at which a picking operation is possible in the weaving cycle in which the loom is stopped for the initial stop and the reed of the loom is not in contact with a weft yarn inserted in the cloth fell of the fabric on the loom, and then the loom is restarted if the loom stopping cause does not entail faulty picking.

4. A loom restarting method comprising the steps of:

providing a loom stopping command upon the occurrence of a loom stopping cause in a loom;

withholding the loom from a picking operation during a braking period to stop the loom for an initial stop in a weaving cycle subsequent to a weaving cycle in which the loom stopping cause occurred;

removing the loom stopping cause; and

restarting the loom for a normal weaving operation;

wherein a decision is made as to whether or not the loom stopping cause entails faulty picking before the loom is stopped for the initial stop; and

the loom is restarted either after reversing the loom to a weaving cycle in which faulty picking occurred, removing a weft yarn picked by faulty picking, and carrying out a one-shot picking operation, or after removing the weft yarn picked by faulty picking, and positioning a main shaft included in the loom at an angular position at which a picking operation is possible in the weaving cycle in which faulty picking occurred and the reed of the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, depending on weaving conditions if the loom stopping cause entails faulty picking; or the loom is restarted after removing the loom stopping cause, and positioning the main shaft of the loom at an angular position at which a picking operation is possible in the weaving cycle in which the loom was stopped for the initial stop and the reed of the loom is not in contact with a weft yarn inserted in the cloth fell of the fabric on the loom if the loom stopping cause does not entail faulty picking.

ABSTRACT

A loom restarting method restarts a loom stopped due to a loom stopping cause without entailing a "wavy set mark". When a loom is stopped due to a loom stopping cause entailing faulty picking, the loom restarting method provides a loom stopping command, withholds the loom from a picking operation during a braking period for braking the loom to stop the same in a weaving cycle subsequent to a weaving cycle in which the loom stopping cause occurred, reverses the loom to the weaving cycle in which faulty picking occurred, removes a weft yarn picked by faulty picking, and restarts the loom to resume a normal weaving operation. The main shaft of the loom is positioned, after removing the weft yarn picked by faulty picking, at an angular position at which a picking operation is possible in the weaving cycle in which the weft yarn picked by faulty picking was removed and the reed of the loom is not in contact with a weft yarn inserted in the cloth fell of a fabric on the loom, and then the loom is restarted.

FIG.1

Loom stopping cause entailing faulty picking

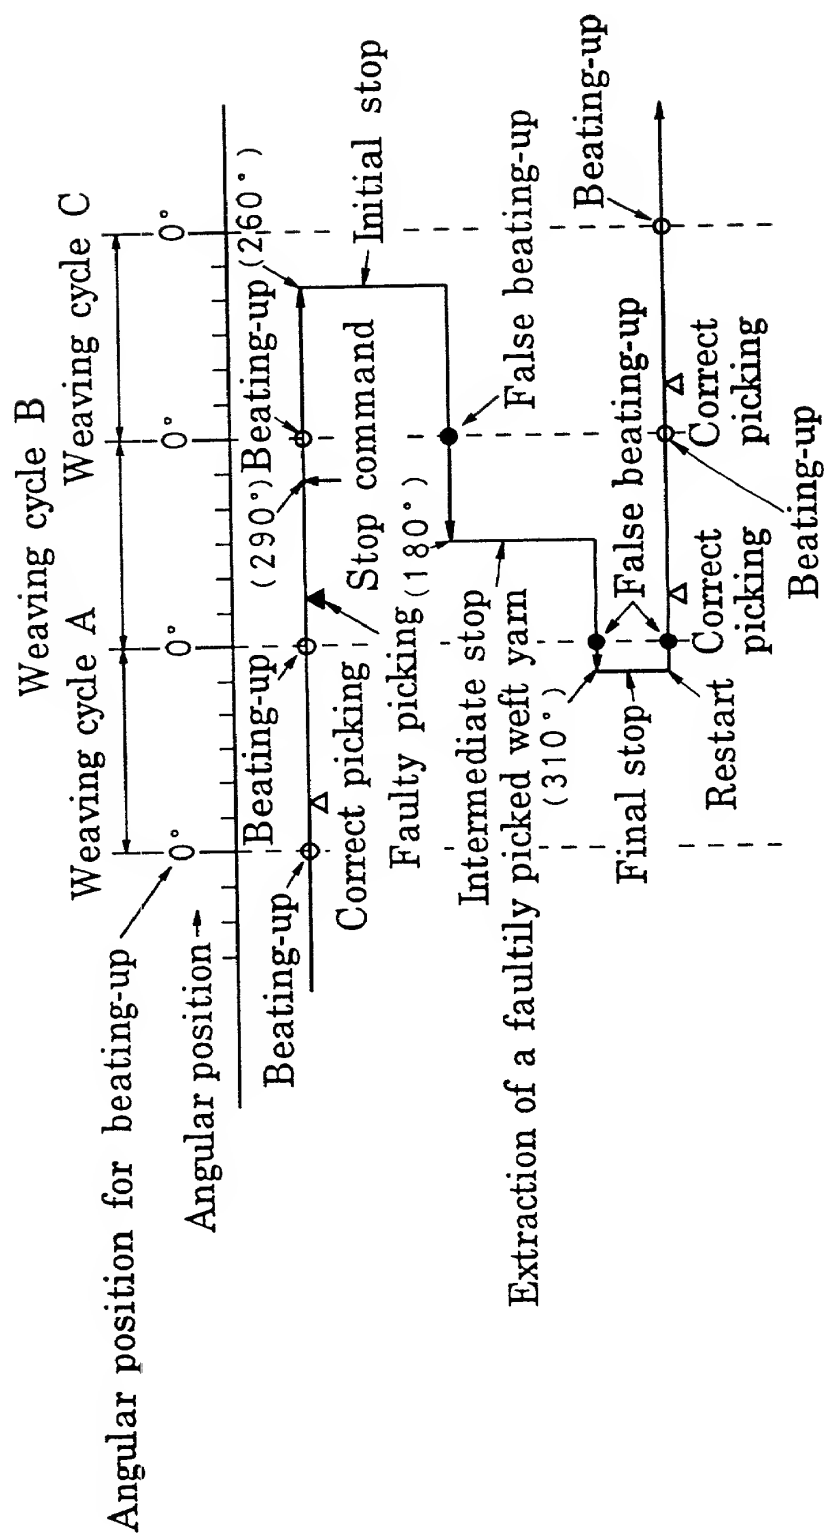


FIG.2

Loom stopping cause other than faulty picking

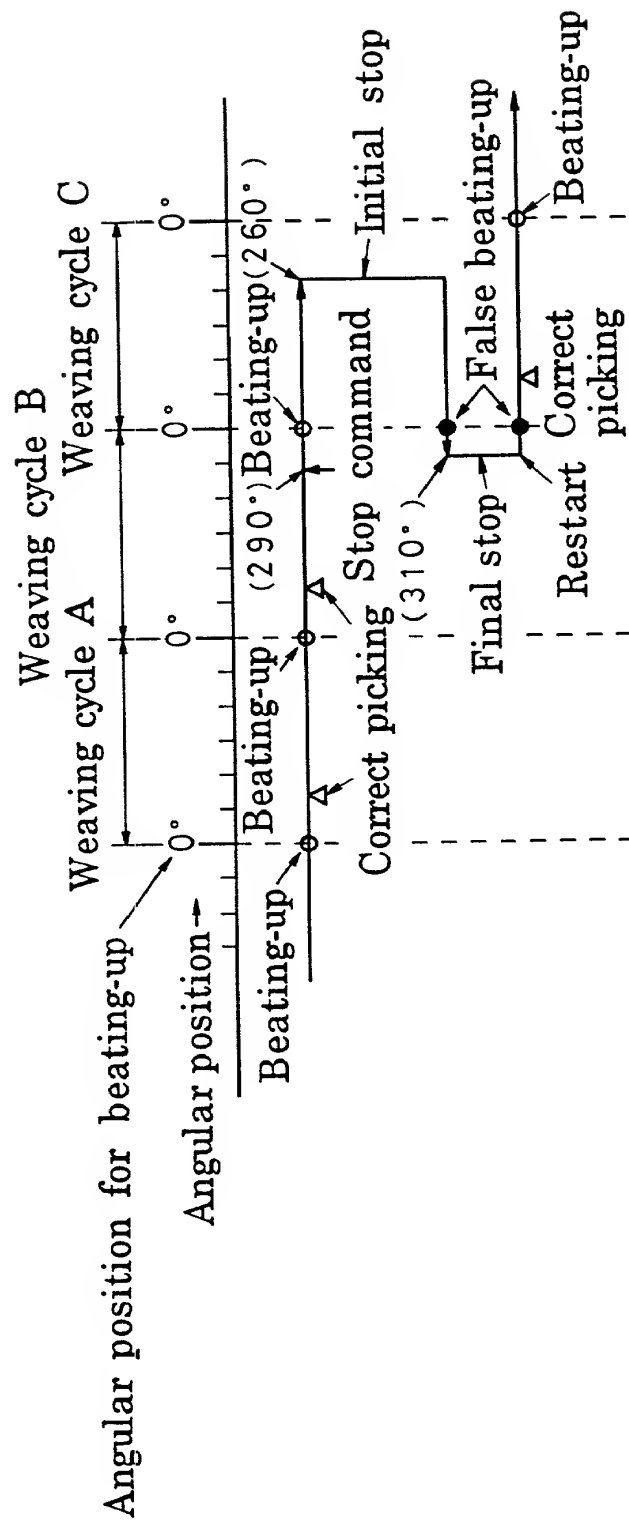


FIG.3

Faulty picking (One-shot-starting method)

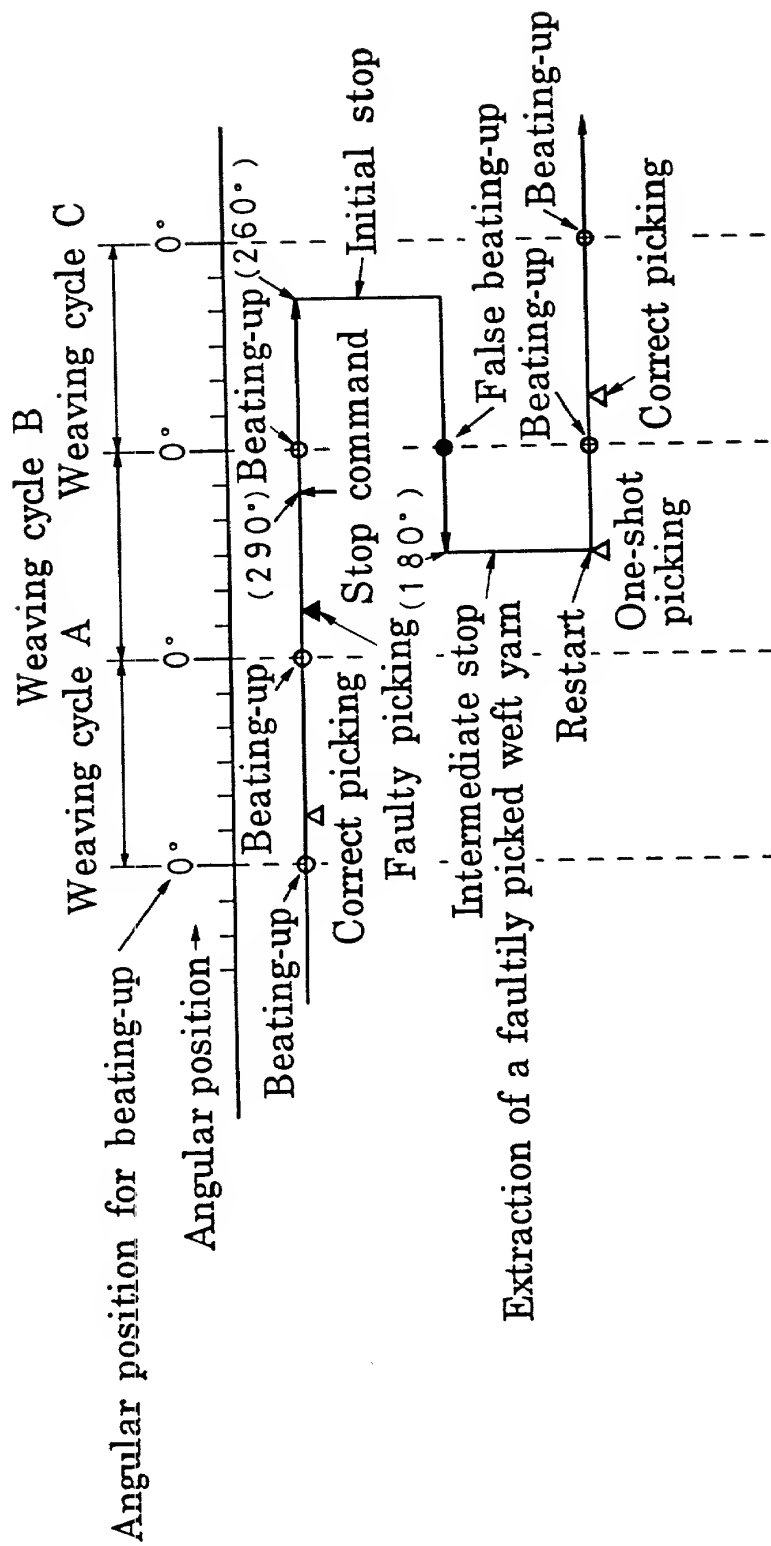


FIG.4

Loom stopping cause entailing faulty picking

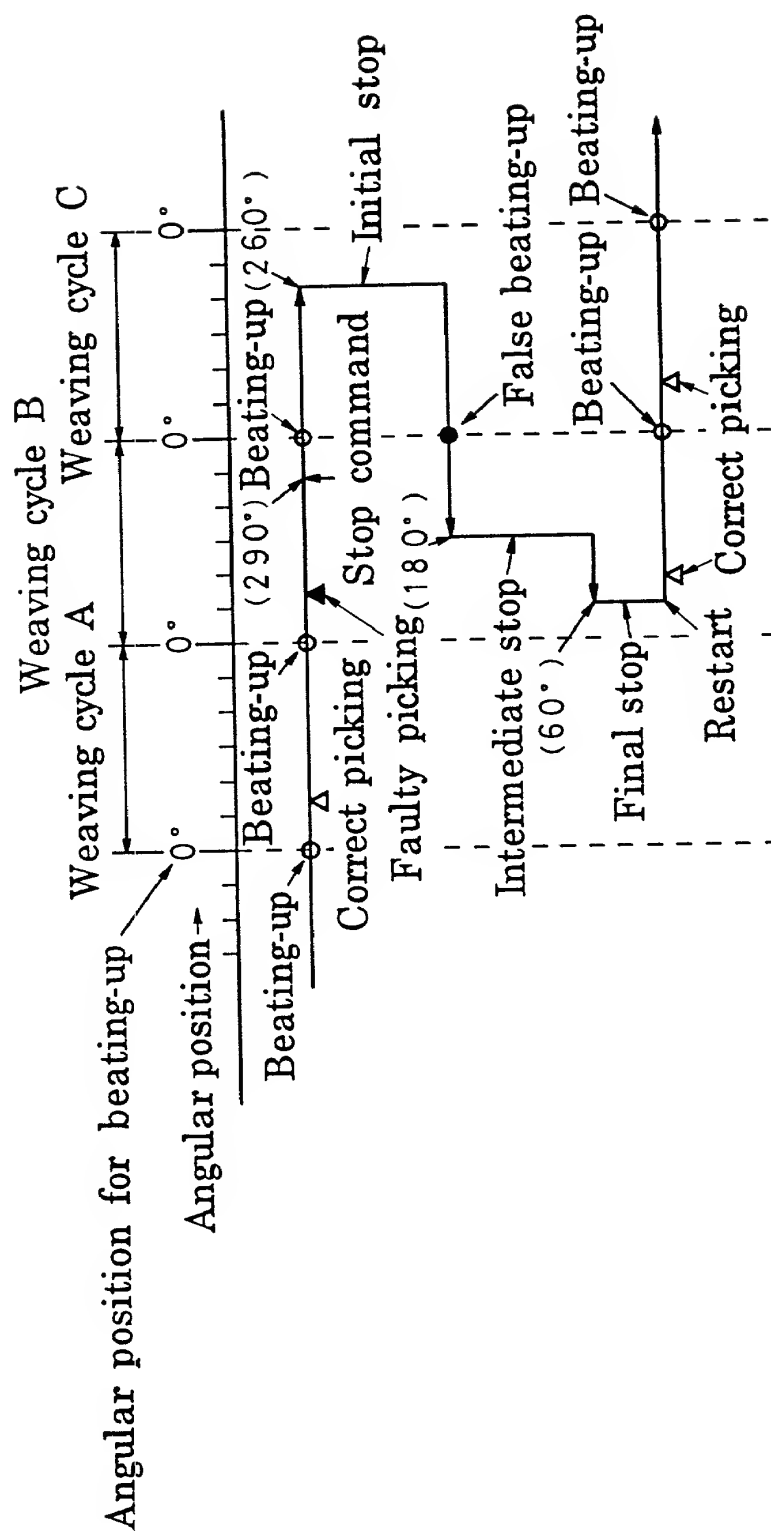


FIG.5

Loom stopping cause other than faulty picking

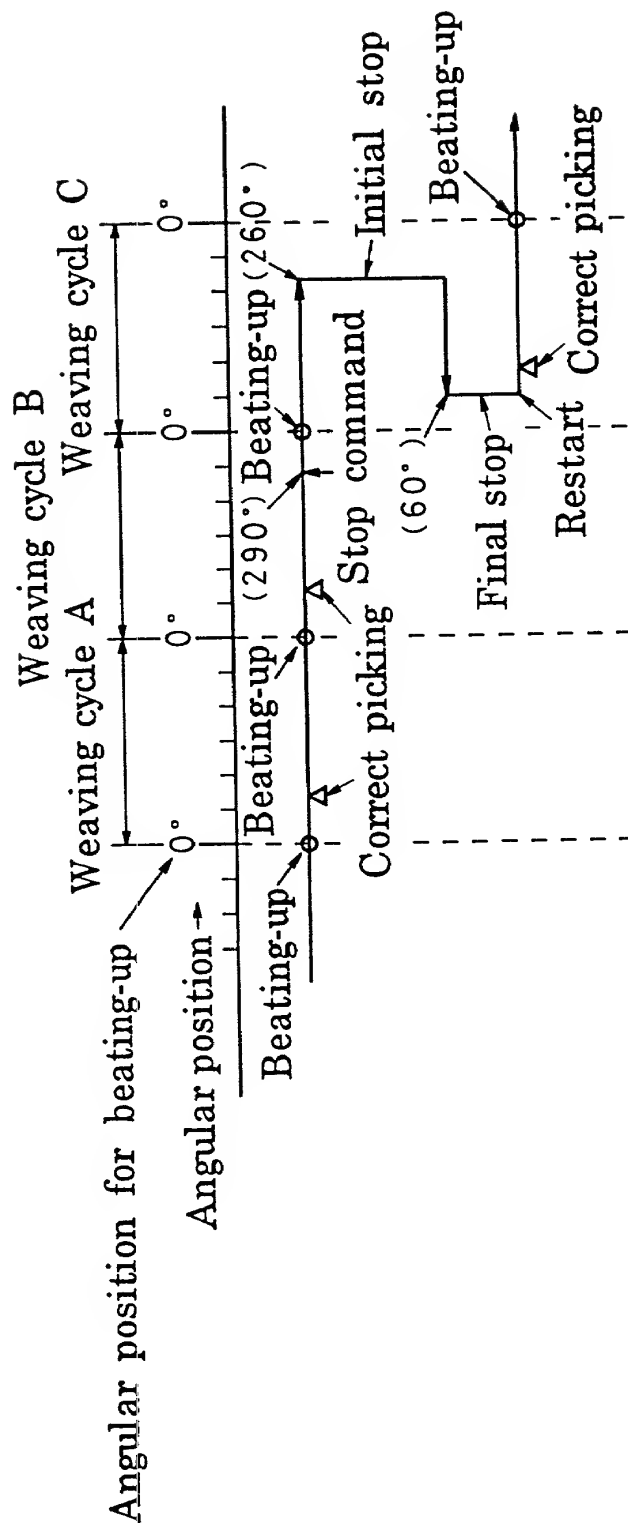


FIG.6

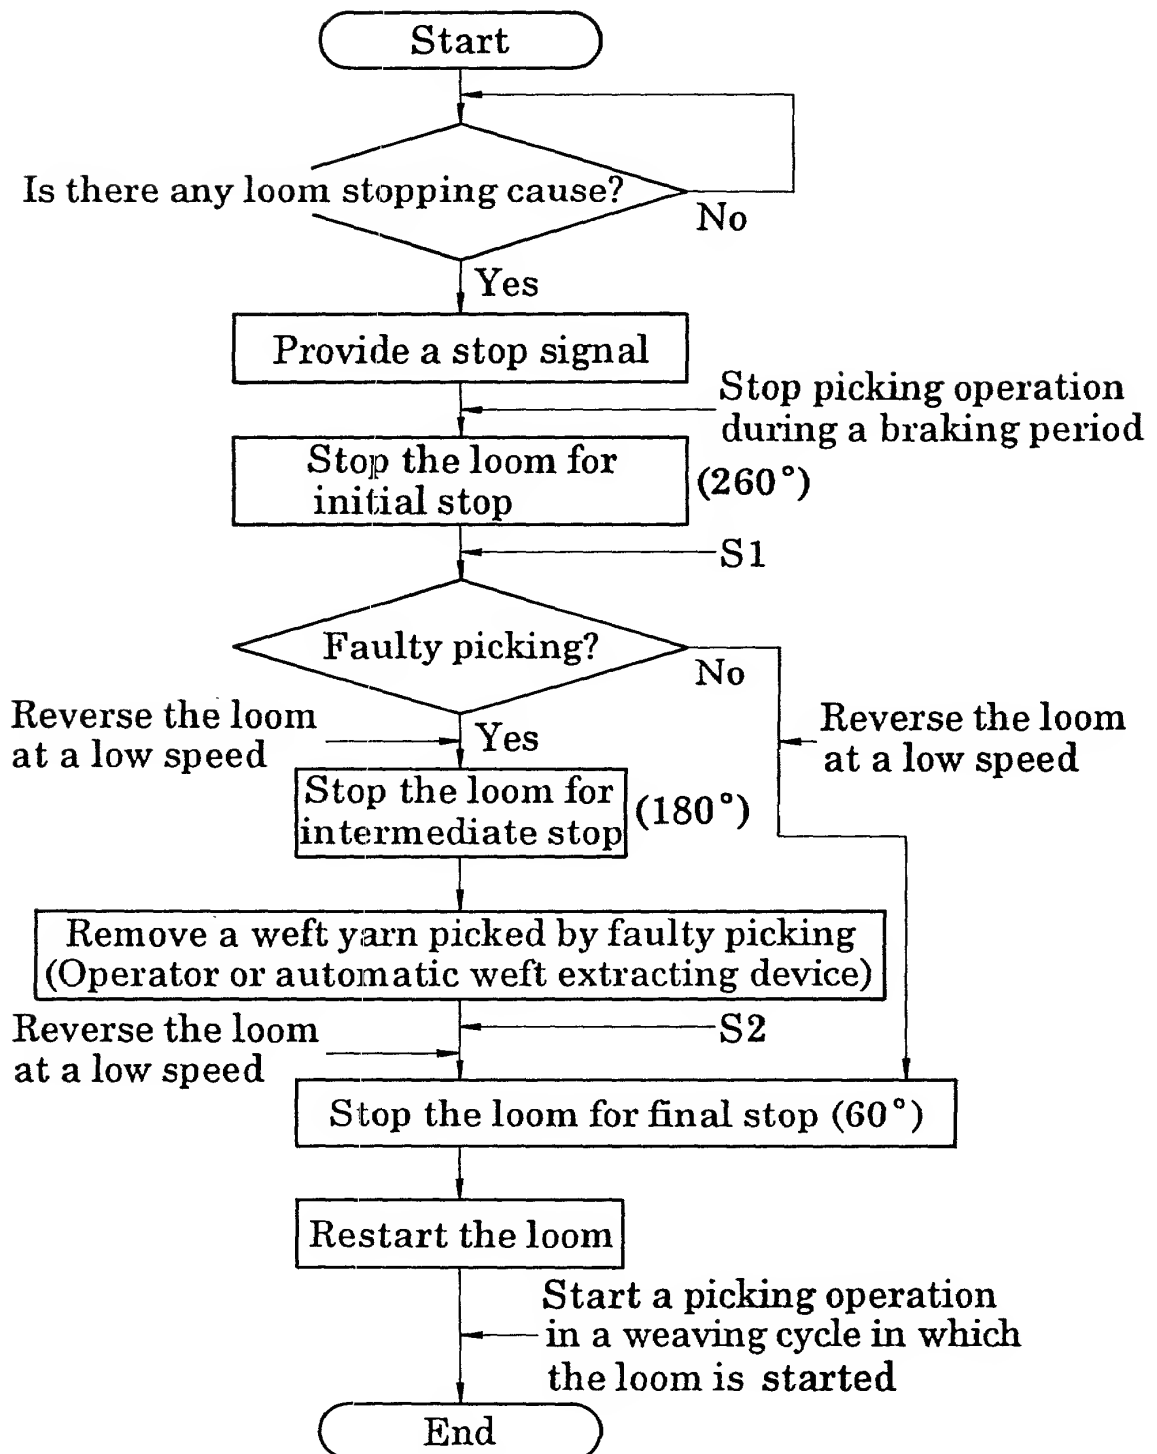


FIG. 7


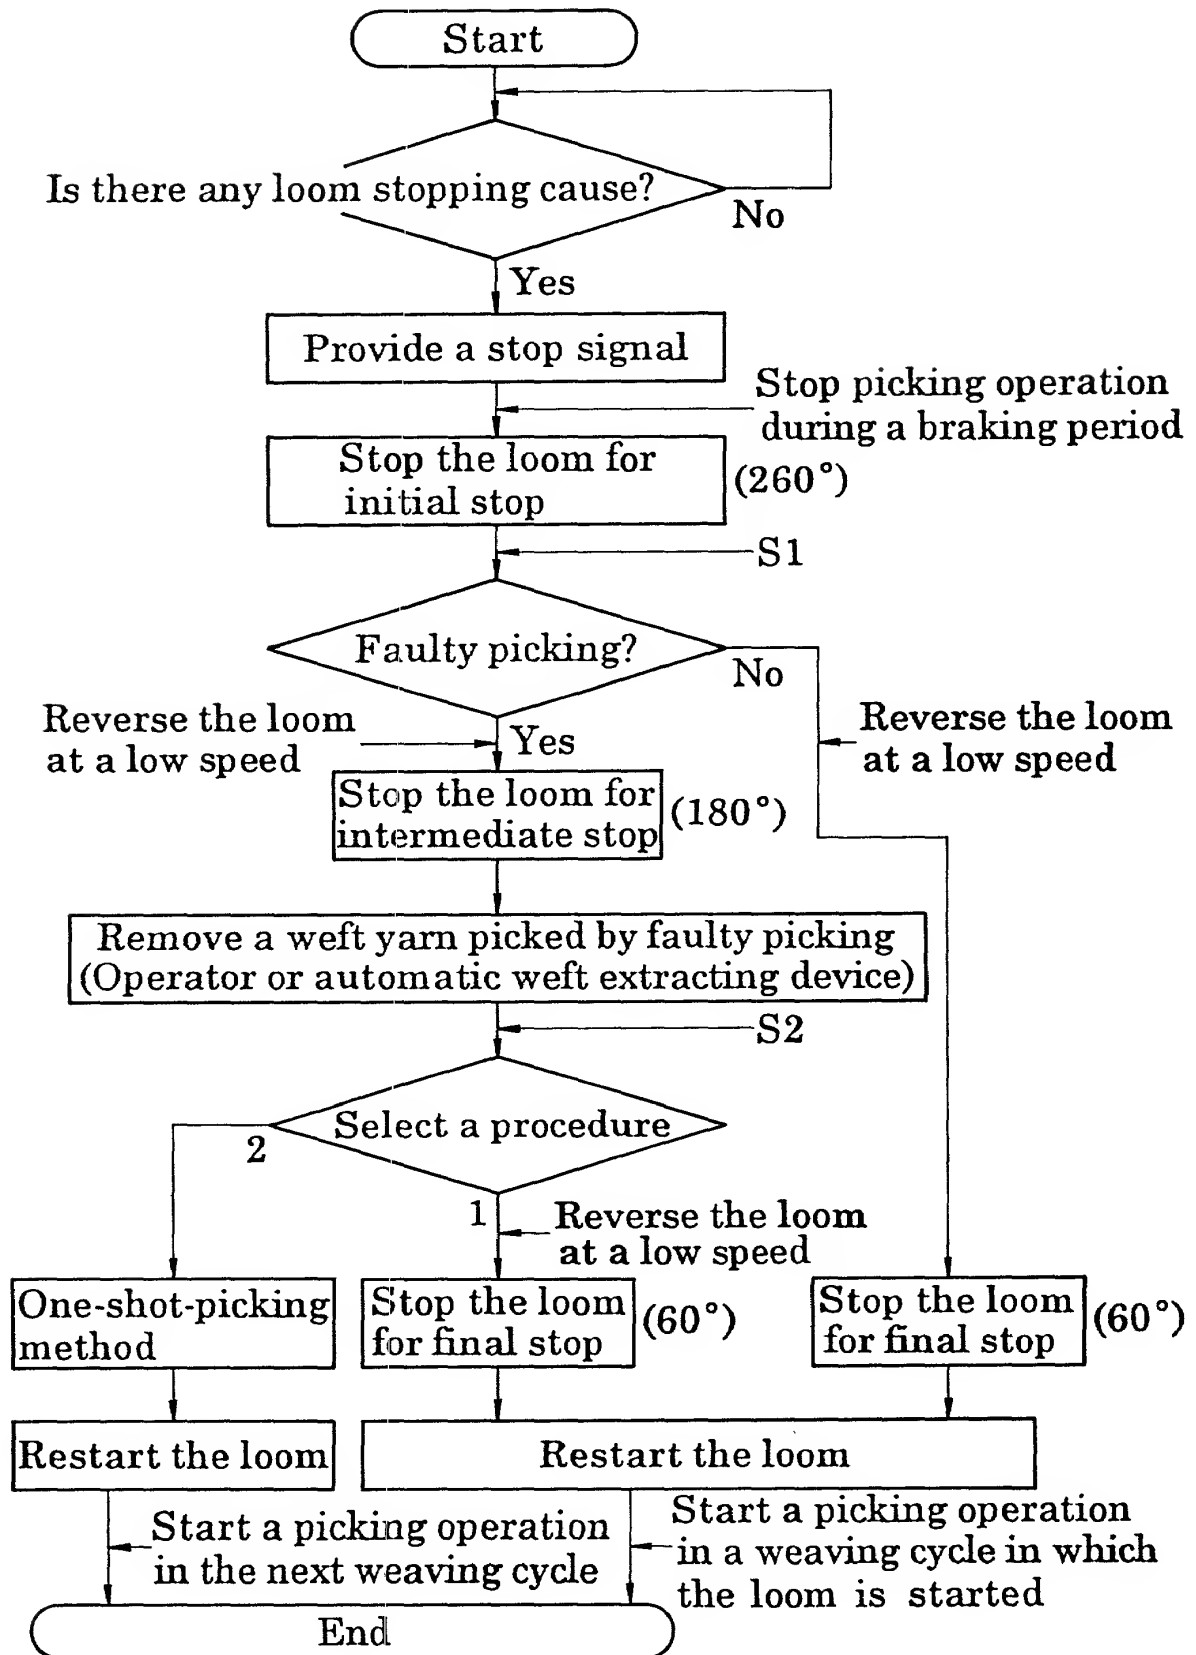


FIG. 8

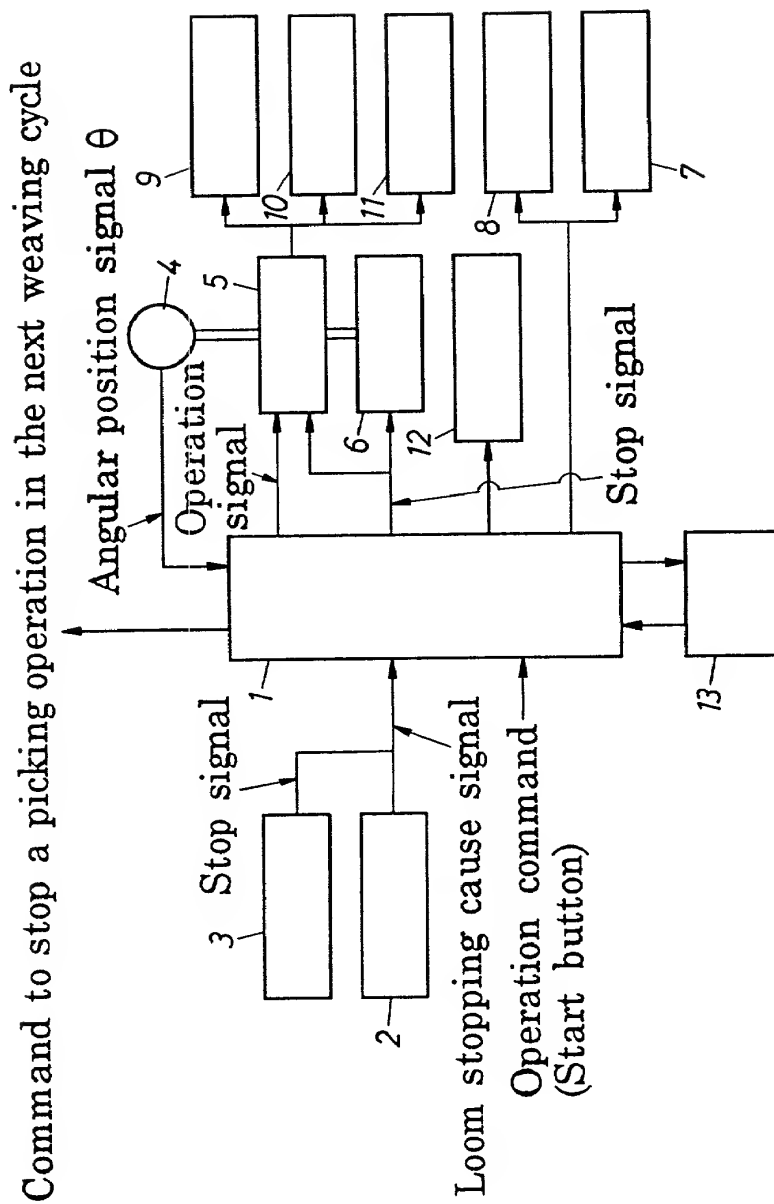

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

(X) Original () Supplemental () Substitute () PCT () Design

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: LOOM RESTARTING METHOD

of which is described and claimed in:

- (X) the attached specification, or
() the specification in the application Serial No. _____ filed _____;
and with amendments through _____ (if applicable), or
() the specification in International Application No. PCT/ _____, filed _____, and as amended
on _____ (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
JAPAN	10-124130	17 April 1998	Yes

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

(90/2615)
9800265 F294
(2/10)

And I hereby appoint John T. Miller, Reg. No. 21,120; Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Noltan, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils E. Pedersen, Reg. No. 33,145 and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from _____ as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Suite 800
Washington, DC 20006

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.
Area Code (202) 721-8200

Direct Facsimile Messages to:

Area Code (202) 721-8250

Full Name of First Inventor	FAMILY NAME MINAMITANI	FIRST GIVEN NAME Norio	SECOND GIVEN NAME
Residence & Citizenship	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS c/o TSUDAKOMA KOGYO KABUSHIKI KAISHA 18-18, Nomachi 5-chome, Kanazawa-shi, Ishikawa-ken, Japan	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken, Japan ZIP CODE 921-8650
Full Name of Second Inventor	FAMILY NAME MATSUMOTO	FIRST GIVEN NAME Masato	SECOND GIVEN NAME
Residence & Citizenship	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS c/o TSUDAKOMA KOGYO KABUSHIKI KAISHA 18-18, Nomachi 5-chome, Kanazawa-shi, Ishikawa-ken, Japan	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken, Japan ZIP CODE 921-8650
Full Name of Third Inventor	FAMILY NAME KITAMURA	FIRST GIVEN NAME Hirohisa	SECOND GIVEN NAME
Residence & Citizenship	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS c/o TSUDAKOMA KOGYO KABUSHIKI KAISHA 18-18, Nomachi 5-chome, Kanazawa-shi, Ishikawa-ken, Japan	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken, Japan ZIP CODE 921-8650
Full Name of Fourth Inventor	FAMILY NAME ARIE	FIRST GIVEN NAME Kiyoshi	SECOND GIVEN NAME
Residence & Citizenship	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS c/o TSUDAKOMA KOGYO KABUSHIKI KAISHA 18-18, Nomachi 5-chome, Kanazawa-shi, Ishikawa-ken, Japan	CITY Kanazawa-shi	STATE OR COUNTRY Ishikawa-ken, Japan ZIP CODE 921-8650

199/2075)
98008 u.s. (F-290)
(3/3)

Full Name of Fifth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Sixth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Seventh Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such wilful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor Norio Minamitani Date 9 April 1999
 2nd Inventor Masato Matsumoto Date 9 April 1999
 3rd Inventor HIROAKA KITAMURA Date 9 April 1999
 4th Inventor KIYOSHI ARIE Date 9 April 1999
 5th Inventor _____ Date _____
 6th Inventor _____ Date _____
 7th Inventor _____ Date _____

The above application may be more particularly identified as follows:

U.S. Application Serial No. _____ Filing Date _____
 Applicant Reference Number _____ Atty Docket No. _____
 Title of Invention _____
